

PRODUCT:

QUANTITY:

ITEM #:

## Designed Smart

### Maximum Overhead Heat!

- New C\*Radiant™ Ceramic Overhead warmers deliver greater heat intensity and efficient infrared radiant energy.
- High wattage version is superior for highly air conditioned passage-ways.
- Over 75% more efficient in providing Infrared energy to your holding area vs Standard Calrod units.

### Easy to Install & Customize to your Operation!

- Ideal for pass through areas that have higher height requirements.
- Wide option of lengths and mounting systems to let you best use the C\*Radiant™ System
  - High Watt mounting heights: 18" to 24"
  - Low Watt mounting heights: 16" to 22"
- Shipped with Side-Mounted Control Box (standard) or remote infinite control box (add R to end of model number.)

## Built Solid

### Most Durable Overhead Warmer in the Industry!

- Stainless Steel Construction resists corrosion, is easy to clean, and presents an attractive appearance.
- Continuous stainless steel housing is the strongest in the industry. Units will not sag or warp.

### Reliability backed by APW Wyott's Warranty

- 1 year parts and labor warranty
- Certified by the following agencies:



C\*RADIANT™ LIGHTED SINGLE OVERHEAD

## APW Wyott Design Features

- Side-Mounted Control Box (standard) or remote control box.

## Options

- Chain Hanging Kits (75901) per foot.
- 18" Tubular Stands (76180)
- Infinite Remote Control 120V/208V/240V (70404273)
- Infinite Remote Control Lights 120V (70410273)
- Infinite Remote Control Lights 120/208V & 120/240V (70403273)

## Consultant Specifications

The Ceramic Food warmer shall be a C\*Radiant™ manufactured by APW Wyott Foodservice Equipment Company, Dallas, TX 75226 U.S.A.

The food warmer shall be model..., rated at ...watts, ...volts, single phase and be ...inches (centimeters) in overall width.

The C\*Radiant™ shall consist of a stainless steel housing, polish mirror stainless steel reflectors, and require either a control box or remote control enclosure.

See reverse side for product specifications.



# C\*Radiant™ Single Overhead Warmers


Models:  FDC  FDLC  -18  -24  -30  -36  -42  -48  -54  -60  -66  -72  L  H

PRODUCT:

QUANTITY:

ITEM #:

## Single C\*Radiant Overhead Warmers

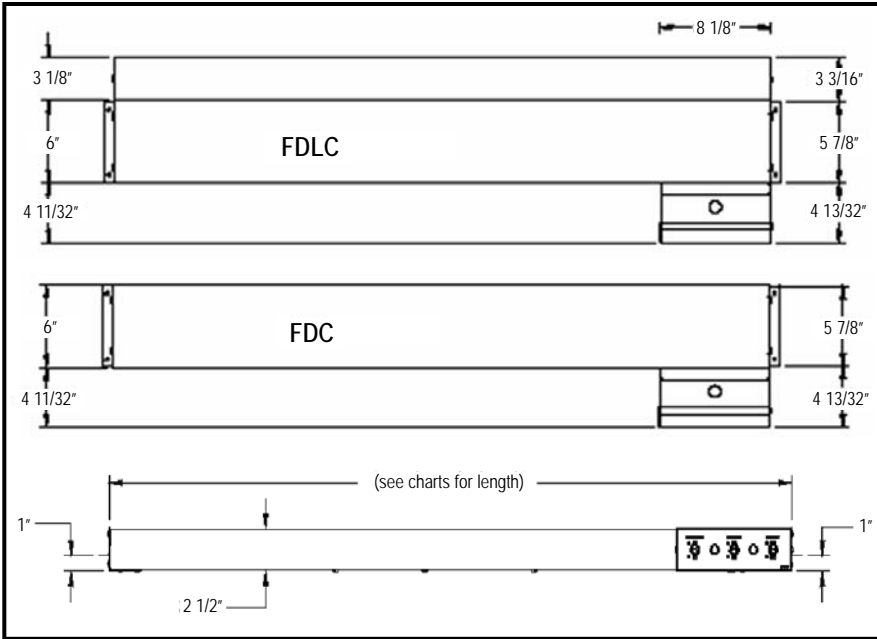

## PRODUCT SPECIFICATIONS

### Construction:

C\*Radiant™ Overheads are supplied with Stainless Steel Housing and control box. Ceramic InfraRed Heating Elements. Polished mirror stainless steel reflectors. Unit is fully insulated with one inch insulation. Hanging Angle brackets are supplied.

### Electrical Information:

C\*Radiant™ Overheads are supplied with a rocker switch that turns the power on and, for lighted units, one that turns on the lights. Standard Single unit sizes 54" and above are only available in 208V and 240V (Lighted unit is 120/208V or 120/240V). High Watt Single unit sizes 48" and above are only available in 208V and 240V. Can order with standard side mounted box or remote infinite control box (add R to the end of model number).

### Electrical Specifications:

Standard Single Units Available in 120V, 208V and 240V

Lighted Single Units Available in 120V, 120V/208V or 120V/240V

### Overall Dimensions:

Single Units: 6" W x 2 1/2" H  
 Lighted Single Units: 9" W x 2 1/2" H  
 Side Mounted Box: 4 13/32" W x 2 1/2" H x 8 1/8" L  
 (See charts for individual lengths)

### Shipping:

Freight Class: 92 1/2  
 FOB: Dallas, TX

	High Wattage			
	Model	Length	Watts	Weight
High Wattage	FDC-18H	18"	700	8 lbs
	FDC-24H	24"	800	9 lbs
	FDC-30H	30"	1150	10 lbs
	FDC-36H	36"	1350	12 lbs
	FDC-42H	42"	1500	13 lbs
	FDC-48H	48"	2000	14 lbs
	FDC-54H	54"	2200	15 lbs
	FDC-60H	60"	2700	18 lbs
	FDC-66H	66"	2700	20 lbs
	FDC-72H	72"	3000	22 lbs
	Standard Wattage			
	Model	Length	Watts	Weight
Standard Wattage	FDC-18L	18"	500	8 lbs
	FDC-24L	24"	700	9 lbs
	FDC-30L	30"	850	10 lbs
	FDC-36L	36"	1000	12 lbs
	FDC-42L	42"	1200	13 lbs
	FDC-48L	48"	1500	14 lbs
	FDC-54L	54"	1500	16 lbs
	FDC-60L	60"	2000	18 lbs
	FDC-66L	66"	2000	20 lbs
	FDC-72L	72"	2000	22 lbs

## Lighted C\*Radiant Overhead Warmers

	High Wattage			
	Model	Length	Watts	Weight
High Wattage	FDLC-18H	18"	780	10 lbs
	FDLC-24H	24"	880	11 lbs
	FDLC-30H	30"	1230	13 lbs
	FDLC-36H	36"	1510	14 lbs
	FDLC-42H	42"	1680	16 lbs
	FDLC-48H	48"	2110	18 lbs
	FDLC-54H	54"	2380	20 lbs
	FDLC-60H	60"	2940	22 lbs
	FDLC-66H	66"	2940	24 lbs
	FDLC-72H	72"	3240	26 lbs
	Standard Wattage			
	Model	Length	Watts	Weight
Standard Wattage	FDLC-18L	18"	580	10 lbs
	FDLC-24L	24"	780	11 lbs
	FDLC-30L	30"	930	13 lbs
	FDLC-36L	36"	1160	14 lbs
	FDLC-42L	42"	1360	16 lbs
	FDLC-48L	48"	1660	18 lbs
	FDLC-54L	54"	1660	20 lbs
	FDLC-60L	60"	2240	22 lbs
	FDLC-66L	66"	2240	24 lbs
	FDLC-72L	72"	2240	26 lbs

\*APW Wyott reserves the right to modify specifications or discontinue models without incurring obligation.



APW Wyott Foodservice Equipment Company · 729 Third Ave., Dallas, TX 75226  
 (800) 527-2100 · (214) 421-7366 · Fax (214) 565-0976 · www.apwwyott.com · info@apwwyott.com

Rev. 5/22/2005  
 #1031